
VERTICAL FOLDING SHUTTERS

The new blackout blind system ensuring safety, easy fitting, insulation, style. An electric motor lifts and lowers it and can stop in any position. Greatest capability of bore dimensioning, as following sizes can be reached from 1000x1000 mm up to 3000x2600mm.

Thermal insulation and sound abatement

Eps internal insulation aluminium panel, greater bore insulation thanks to rail reduced sizes and no built-in box.

Safety

- Aluminum structure
- closed panels completely caplanar
- movement only by electric motor
- 6 locking points



VERTICAL FOLDING SHUTTERS

**HANDINESS AND STYLE**

This product is easy to fit to any situation thanks to its built-in side rails and reduced upper space occupied by profile.


VERTICAL FOLDING SHUTTERS



Completely coplanar panels when closed vertically;
complete opening by horizontal panels.



Wide range of colour and finish is available, thanks to
its greatest capability to integrate into architecture

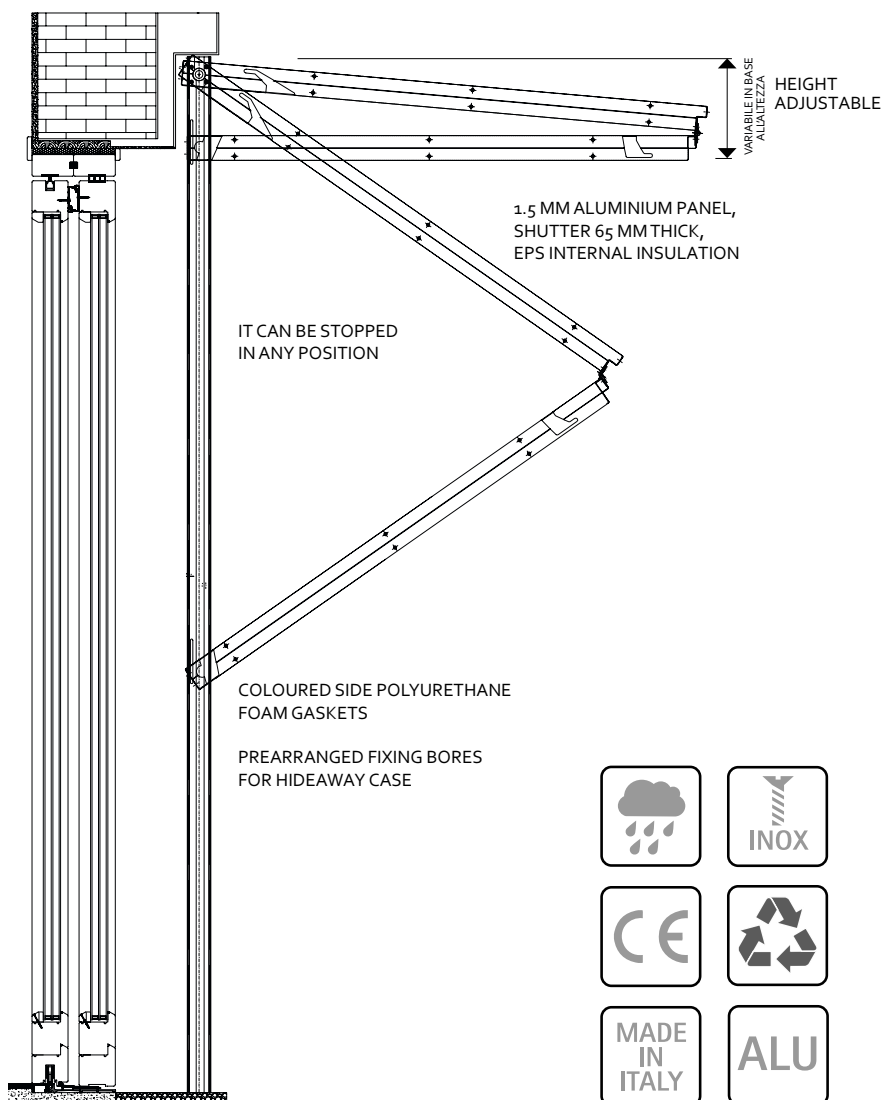

Power supply	230V 50Hz
Panel section (mm)	65
Aluminium panel thickness	15/10
Folder finish	Cartella RAL
Minimum size (mm)	1000x1000
Maximum size (mm)	3000x2600